


Painted steel frame machine

Ideal for dusty working environment, such as sawmill plants, brick and tile industries.

Adjustable table height between 420 mm and 770 mm

TP-201Y

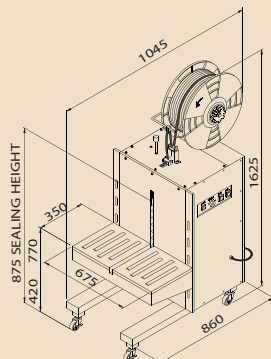


Stainless steel frame machine

Stainless steel frame SUS 304

Ideal for moist working environment, such as meat, fish, poultry and agricultural processing plants.

Adjustable table height between 420 mm and 770 mm

TP-201YS

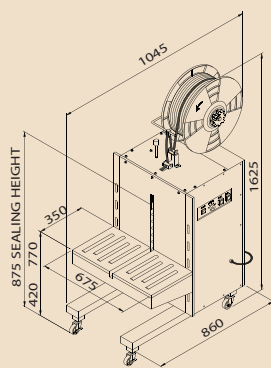

Main Features

- Offer high reliability and performance
- Suitable for low volume applications
- Easy operation, simple maintenance
- Mechanical outside tension control
- Reliable P.C. Board control
- Proven quality

Options

- With cooling time (0-2 sec.)
- Selected parts in stainless steel (for TP-201YS)

Technical Data

Strap Width 6 mm-15.5 mm adjustable

Strap Tension 15 kg to 45 kg

Net Weight 125 kg

Electrical Requirements

110V, 220V, 230V 50/60Hz 1PH

Economy Machine

Affordable for every budget

TP-201Y TP-201YS

The TP-201Y series machines are semi-auto side-seal strapping machines. The strapping head is mounted on the side of the machine frame to protect it from dust and water. Great for dirty, moist, or harsh working environment.

