


Tauris Transit

Simple and Reliable,
Designed for General
Purpose Applications


TP-601A

Roller-Driven Table

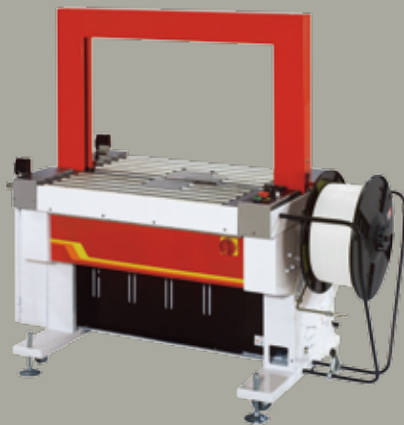

TP-601B

Belt-Driven Table

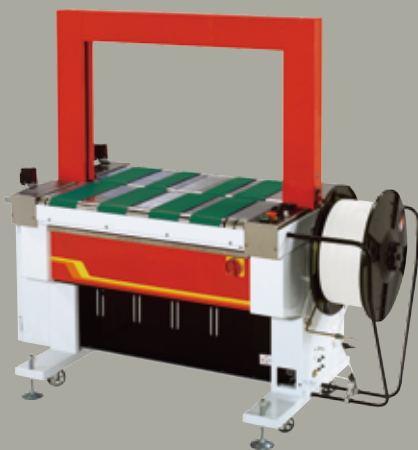

Tauris Transit strapping machines are the simplest and most reliable strapping machines for general purpose applications on the market today.

Main Features



Reliable and Robust Strapping Head

Robust mechanism design and high engineering standard ensure excellent durability of the products. Use two proximity switches to replace conventional limit switches.



Auto Strap Feeding

Simply insert the strap into the feeding rollers from the coil side of the machine and then push the "reset" button. The machine will automatically feed the strap without the need to access to the inside of the machine. No need to remove it from the line for strap feeding. Easy strap loading.



Auto Strap Ejector

Loop-eject clears unwanted strap automatically if the machine is accidentally activated without a package. Eliminates downtime.





Electronic Tension Control

External adjustment of strap tension by the simple turn of a dial. Easy operation.



Belt Transmission

Instead of using roller chain, belt transmission system ensures long operational life and quiet operation.



Hinged Top Plates

Opens wide for quick cleaning, inspection, and maintenance of strapping head, strap-feed and tensioning unit.

Options

- **Siemens PLC control**
- Variable conveyor speed: from 18 meter/minute to 42 meter/minute
- Safety guards
- Foot pedal switch
- **Stainless steel frame SUS 304 (TP-601AS, TP-601BS)**

Arch Sizes

H \ W	850	1050	1250
400			
600	Ⓢ		
800			
1000			

Ⓢ Standard size: 850 mm(W) x 600 mm(H)

More Features

Conveyor Speed

30 meter/minute

Multiple Strap Function

For single, double, continuous strapping or transit mode

Up and Down Stream Interlock


With complete plug connection

Easy Bundle Flow Direction Change


The bundle flow direction could be reversed easily to meet different production line requirement

Strap End Ejector

Automatic end-strap detection and ejection. Get the machine ready for next coil of strap

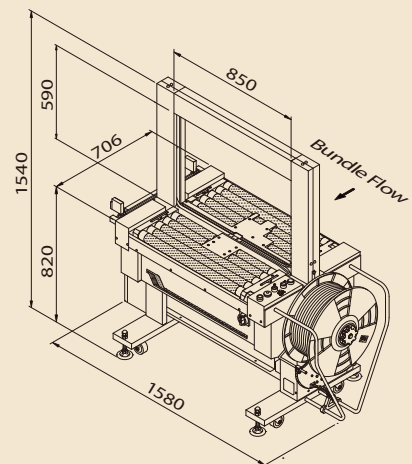

TP-601A

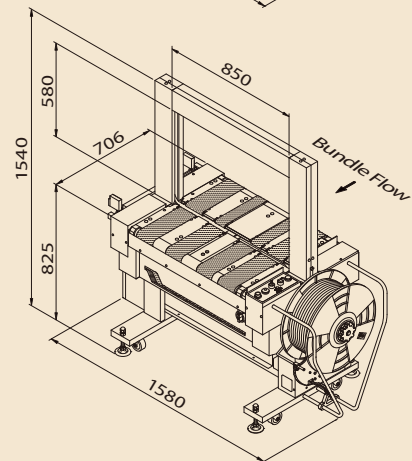

TP-601B

TP-601A / TP-601B

Technical Data

Strap Width 8 mm-12 mm

Strap Tension 7-70 kg

Speed Up to 18 packages per minute (60Hz)
(Cycle speed up to 29 straps per minute)

Table height 820 mm for TP-601A
825 mm for TP-601B

Net Weight 330 kg

Electrical Requirements

220V, 380V, 400V 50/60Hz 3PH